



FON-860i Telephone Start Guide



FON-860i Telephone Start Guide

August 25, 2015

Copyright© 2015 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., in the U.S. and other jurisdictions, and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. In no event does Fortinet make any commitment related to future deliverables, features or development, and circumstances may change such that any forward-looking statements herein are not accurate. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.

FortiVoice

fortivoice.com

Technical Documentation

docs.fortinet.com

Knowledge Base

kb.fortinet.com

Customer Service & Support

support.fortinet.com

Training Services

training.fortinet.com

FortiGuard

fortiguard.com

Document Feedback

techdocs@fortinet.com

Introduction


Congratulations on your purchase of the FON-860i Cordless DECT Phone!

This guide describes how to install and add your new telephone handset to the FON-860i base. For more information, please see the *FON-860i Telephone User Guide* at docs.fortinet.com/ffone.html.

Installation


Installing the handset charger

1. Place the handset charger within the signal range of the base. The handset has an indoor signal range of up to 150 feet (50 meters) from the base. Concrete and metal objects might affect the signal range.
2. Connect the power adapter from the power outlet to the power supply connector.

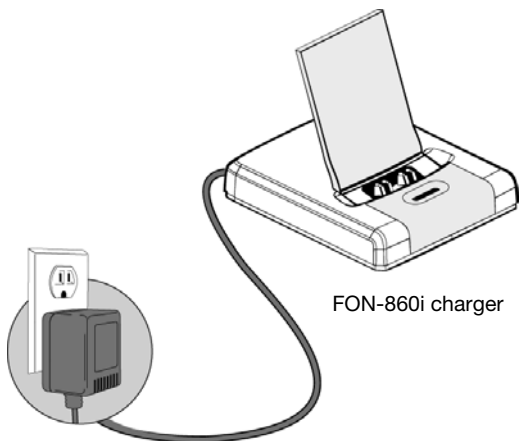


Installing the battery

1. Release the battery cover from the bottom.

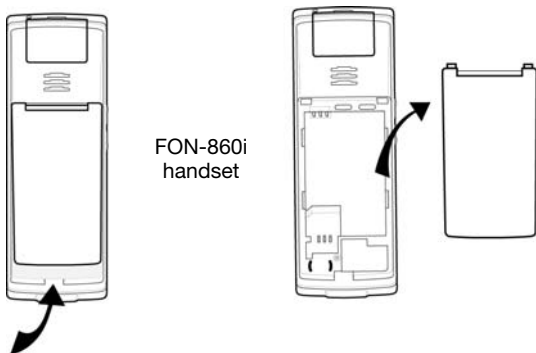

2. Insert the Li-ion cell battery in the handset, making sure it is placed as shown in the illustration, and then slide the battery cover shut.

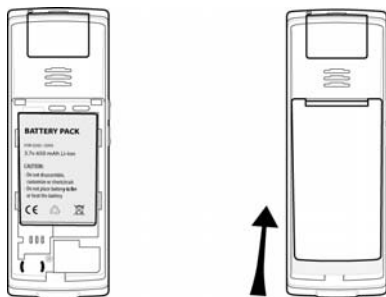

Charging the battery

1. Place the handset in the handset charger. The handset turns on, and the battery charge indicator in the display starts to flash.



2. Charge the battery for at least 10 hours before first use.

Registering handsets with the base




A base can support up to three handsets with three concurrent calls. It can support up to eight handsets if they aren't all used at once. If you have more than three handsets and are getting busy signals, add more bases to your installation in order to handle more calls.

1. Press the *Reset* button on the back of the base. A five-minute registration period starts, which allows handsets to register with the base.



If you have multiple bases, only reset one base at a time, and wait five minutes before resetting the next base.

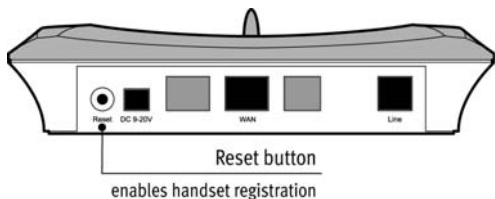

2. If the handset is turned off, press the *Red Phone* key to turn it on.

- Place the handset in the handset charger. The handset automatically registers with the base, and the *Configure SIP Domain* message appears on the display. This message indicates that you must configure the FON-860i as an IP extension, as described in the *FON-860i Telephone User Guide*. Once the handset is registered, the left connection status indicator in the display will turn yellow.

Connection status indicators

- Black/black – out of range of the base
- Yellow/black – within range of the base, but not ready for Internet calls
- Yellow/yellow – within range of the base, and ready for Internet calls

Handset name



- Once the handset is registered, you can place additional handsets in the handset charger for registration. If the five-minute registration period has expired, but the handsets aren't all registered, press the *Reset* button on the back of the base to start a new registration period.

Configuration information

For information on configuring, using and troubleshooting the phone, see the *FON-860i Telephone User Guide*. It is included with the base of the FON-860i and is available at <http://docs.fortinet.com/ffone.html>.

Warranty

This phone is covered by a one-year hardware warranty against manufacturing defects as set forth in the EULA.

www.fortivoice.com/support

For warranty service:

- ***In North America***, please call 1-866-648-4638 for further information.
- ***Outside North America***, contact your sales representative for return instructions.

You will be responsible for shipping charges, if any. When you return this telephone for warranty service, you must present proof of purchase.

